


STREAMLIGHT SYSTEM

Extruded aluminium profile equipped with integrated LED for direct and indirect lighting. Anti-glare UGR

Technical drawings

All measurements are expressed in mm




Beam	85°*85°
W	27W+3W
Kelvin	3000 °K
Led	SAMSUNG
Lumen	2700+300
Cri	>82
Ugr	<19
Pf	0,9
Driver	ON/OFF
Weight	1,8 kg

Data sheet

Certifications



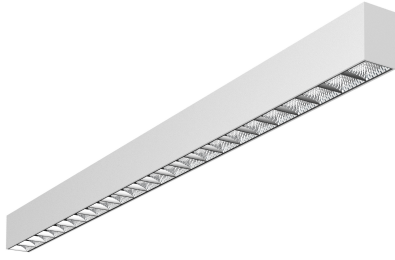

STREAMLIGHT SYSTEM

Extruded aluminium profile equipped with integrated LED for direct and indirect lighting. Anti-glare UGR

Technical drawings

All measurements are expressed in mm



Beam	85°*85°
W	27W+3W
Kelvin	4000 °K
Led	SAMSUNG
Lumen	2700+300
Cri	>82
Ugr	<19
Pf	0,9
Driver	ON/OFF
Weight	1,8 kg
Data sheet	

Certifications

