

Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

Compatible with leading and trailing edge mains dimmers. Please note that low power consumption on some products can affect dimming properties.

Mounting

Suspension type: Cable and wire, 2x0,75mm² Canopy: Yes. Cable length: 4m

Finish

Black or white, matt, wet painted.

Materials

Shade: Spun aluminium. Diffuser: Injection moulded PC.

Sizes and weights

Width x Height x Length (mm) | 400 x 270 x 400 Max 4.9 kg | 175 x 134 x 175 Max 2.4 kg | 250 x 270 x 250 Max 1.6 kg | 650 x 270 x 650 Max 6.6 kg

Class

Ingress protection IP20. Electric shock protection I.

Light source

LED 2700K 31W

Lumen: 2035

Information

Compatible with leading and trailing edge mains dimmers. Please note that low power consumption on some products can affect dimming properties.



Product family



Keglen Table




Keglen Wall




Keglen Floor

Light distribution diagrams


Cartesian

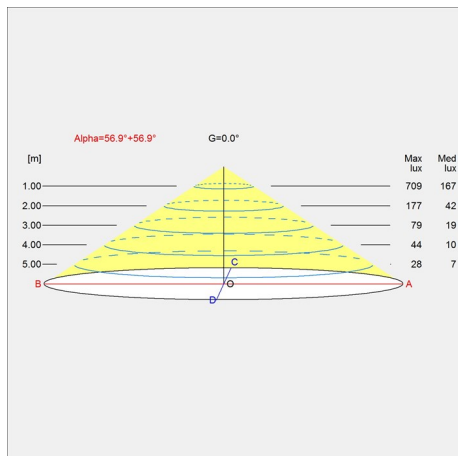

Isolux

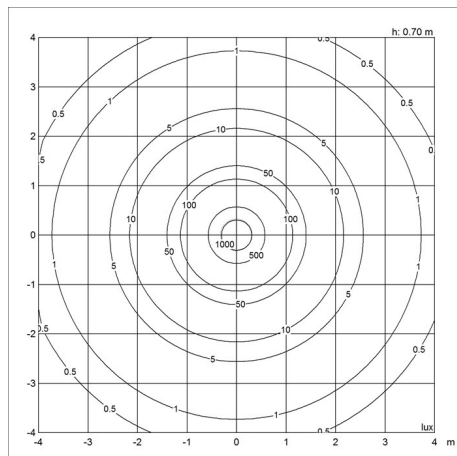

Polar

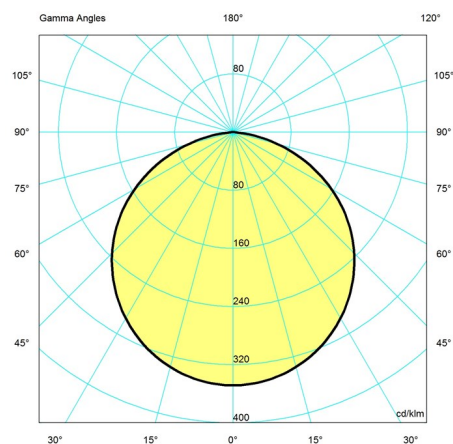

Data specifications

Colour	Black
Width	650
Built-in Height	-
Class	I
Standby (W)	<0,5
Inrush Current	5 A / 50 µs
Kelvin	2700
SDCM	3
Watt	31
Light control	Dali
UGR Transversal / Axial	18.8/18.8
Driver life	100000

Length	650
Height	270
IP class	20
Net Weight	6.6
Power Factor (P = 100 % / P = 50 %)	-
Light source	LED 2700K 31W
CRI	90
Lumen	2035
Efficacy	66
Min. Dim Level (%)	1
L80B50 (hours)	>50000