




Super Line Pro Up&Down

LED luminaire for direct and indirect lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately. Greater Up or Down intensity can be selected using power kits with a device with two independent outputs.

LED luminaire for direct and indirect lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately. Greater Up or Down intensity can be selected using power kits with a device with two independent outputs.

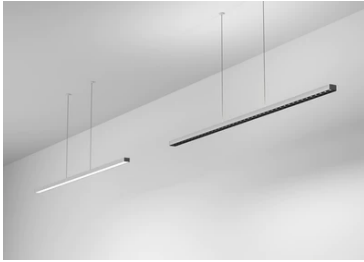


Main specifications


Number of heads	1	Net lumen (lm)	6314
Lamp category	LED	Mountings	Suspension
Power (W)	60W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

Optical

Lighting type	Indirect, Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	80
Beam angle C90-270 (°)	80
Beam angle ind (°)	110
Beam angle ind C90-270 (°)	110
UGRL	14




Beam Angle:	80°	
h(m)	E(lx)	D(m)
1	2367	1.68
2	592	3.36
3	263	5.04
4	148	6.72
5	95	8.40



Electrical

Voltage (V)	55.80	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Non Dimmable, Dimmable DALI		
	1		
Emergency	Without		



Physical

Orientation	Fixed
Weight (kg)	1.45
Length (mm)	1500

Note


UGR<19 & cd/m2 @ 65°<3000 workplace optimised. Cable 4,25 m



Super Line Pro Up&Down

LED luminaire for direct and indirect lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately. Greater Up or Down intensity can be selected using power kits with a device with two independent outputs.

LED luminaire for direct and indirect lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately. Greater Up or Down intensity can be selected using power kits with a device with two independent outputs.

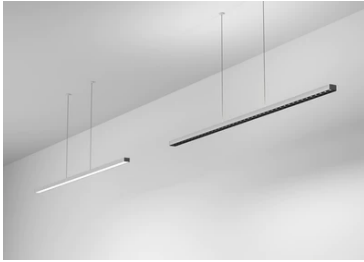


Main specifications


Number of heads	1	Net lumen (lm)	7301
Lamp category	LED	Mountings	Suspension
Power (W)	60W	Environment	Indoor dry location
CCT (K)	4000K		
CRI	90		

Optical

Lighting type	Indirect, Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	80
Beam angle C90-270 (°)	80
Beam angle ind (°)	110
Beam angle ind C90-270 (°)	110
UGRL	14



Beam Angle:	80°	
h(m)	E(lx)	D(m)
1	2275	1.68
2	569	3.36
3	253	5.04
4	142	6.72
5	91	8.40



Electrical

Voltage (V)	55.80	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Non Dimmable, Dimmable DALI		
Emergency	Without		

Physical

Orientation	Fixed
Weight (kg)	1.45
Length (mm)	1500

Note

UGR<19 & cd/m2 @ 65°<3000 workplace optimised. Cable 4,25 m

